



บริษัท ไทย เอ.เค. เอ็นจิเนียร เทค จำกัด
THAI A.K. ENGINEER TECH CO., LTD.

188/113 Moo 3 Thepharak Rd., Bangpleeyai, Bangplee, Samutprakarn 10540 Thailand
188/113 หมู่บ้าน บ้านใหม่ หมู่ 3 ถนนเทพารักษ์ ต. บางพลีใหญ่ อ.บางพลี จ.สมุทรปราการ 10540
Tel: 0 2325 4355-9 Fax: 0 2116 8162 Website: www.thai-ak.com
E-mail: info@thai-ak.com, thai-ak@hotmail.com, thai.ak56@gmail.com, thai.ak56@yahoo.com

Self-Propelled Scissor Lifts


AK - JCPT 1412 DC , AK - JCPD 1614 DC





Self-Propelled Scissor Lifts

TECHNICAL DATA	MODEL	
	AK - JCPT 1412 DC	AK - JCPT 1612 DC
S.W.L	230kg	200kg
S.W.L On Extension	113kg	
Maximum Workers Number	2	
Working Height (H1)	13.80m	15.70m
Platform Floor Height (H2)	11.80m	13.70m
Overall Length	2.48m	2.84m
Overall Width	1.15m	
Overall Height(Rails up)	2.59m	
Overall Height(Rails down) (A)	2.17m	
Platform Size	2.27m×1.12m	
Platform Extension Size	0.90m×1.12m	
Ground Clearance(Stowed)	0.1m	
Ground Clearance(Raised)	0.019m	
Wheel Base	1.87m	
Turning Radius(Inside)	0	
Turning Radius(Outside)	2.20m	
Drive Motors	24V/1.5kw	
Lifting Motor	24V/3kw	
Travel Speed(Stowed)	4km/h	
Travel Speed(Raised)	0.8km/h	
Up/Down Speed	84/38 sec	88/60 sec
Batteries	4×6V/210Ah	
Integrated Charger	24V/25A	
Gradeability	25%	
Maximum Working Slope	2-3°	
Tyre	Φ 381×127mm	
Gross Weight	2760kg	2800kg

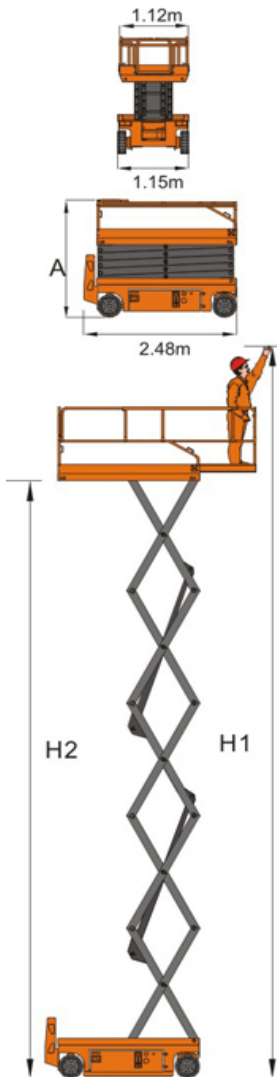

● Standard equipment

- Proportional controls
- Automatic pothole protection
- Self-lock gate on platform
- Drivable at full height
- Non marking tyre
- 2WD
- Automatic brakes system
- Emergency stop button
- Emergency lowering system
- Cylinder holding valve
- Onboard diagnostic system
- Tilt sensor with alarm
- All Motion Alarm
- Horn
- Hour meter
- Safety brackets
- Forklift pockets
- Folding guardrails
- Extended platform
- Charger protection
- Flashing beacon
- Roll-out extension platform provide more workspace

● Options

- Overload sensor with
- AC power on the
- Platform work lights
- Airline to the platform